

Instructions and tips


What to pay attention to during assembly?

1. Choosing a place

We recommend that there should be a safe surface around the trampoline.

2. Ground hole

Make a 40 cm deep earth OR concrete hole. The opening should be larger than the dimensions of the trampoline by 30-40 mm per side.

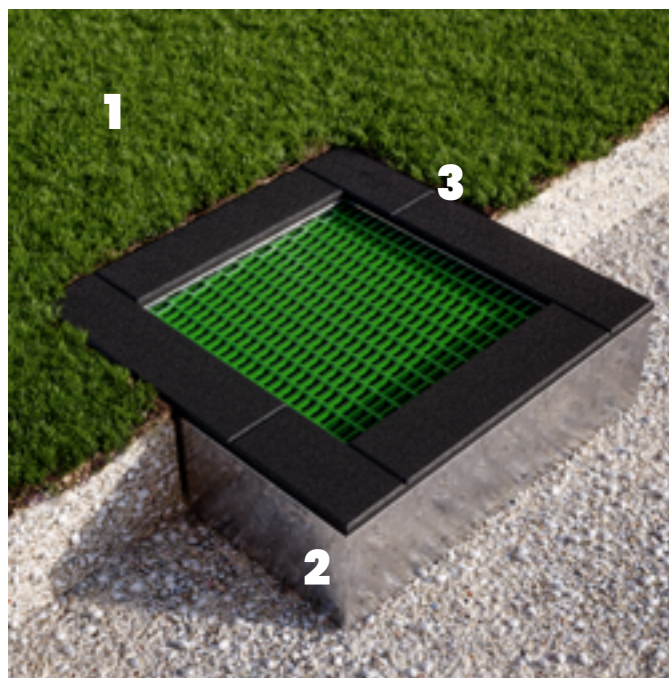

3. Assembly


Before inserting the trampoline, level the ground.

The trampoline is directly mounted on the hardened ground, which needs to be permeable to water.

Cleaning

One-piece, non-opening

To clean the trampoline you need to remove part of the jumping mat. Removing the mat is simple and involves sliding the rope shackles from the springs located along the perimeter of the body of the trampoline.

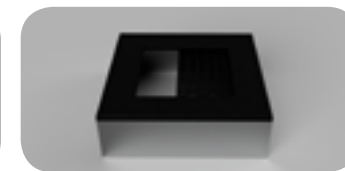

Two-piece, opening

Once you open the cover of the trampoline you can clean it inside.

